


Features

- ◆ Cast aluminum, plastic-sprayed.
- ◆ Easy to assemble and calibrate, high reliability.
- ◆ Fully encapsulated, water proof and moisture proof.
- ◆ Operating temperature: -40°C ~ +85°C
- ◆ IP65

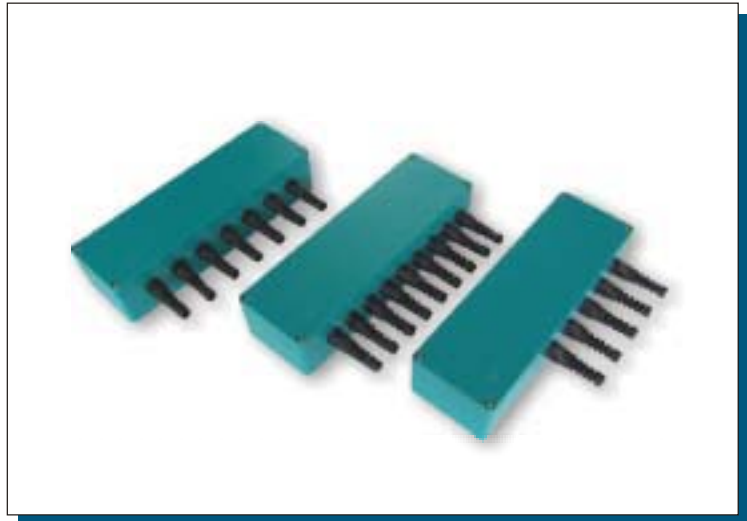

Description

- ◆ Special for scales
- ◆ 2 to 8 channel, load cells with 4 wire or 6 wire cable

Part Number	Channel
JB01-2	2
JB01-3	3
JB01-4	4
JB01-6	6
JB01-8	8

Outline Dimensions in mm(inches)

